

DECK DEFENSE

Staining Made Easy

Power Wash. Stain Immediately. Done.

- HARVEST WHEAT #1920
- HONEY MAPLE #1930
- REDWOOD #1940
- HICKORY #1950
- WEATHERED GRAY #1960

LONG-LASTING BEAUTY
AND PROTECTION:

- DECKS
- FENCES
- RAILINGS

UV INHIBITING PIGMENTS

PROTECT FINISH FROM THE SUN

SPECIFICALLY FORMULATED TO

PROTECT AGAINST MOLD AND MILDEW

Bio-Pruf[™]
TREATED

to resist the growth of mold, mildew and odor-causing microbes

5 US GALLONS/42.35 LBS./18.92 LITERS

PERMA-CHINK[®]
SYSTEMS, INC.

1-800-548-3554

DECK DEFENSE

Surface Preparation:

To obtain the best results on your project, make sure the surface is clean and free of any old coatings. If wood is grayed from UV exposure restore natural color to the surface with Wood Renew™. Remove all standing water prior to application. New pressure treated wood should be allowed to season for a minimum of four weeks to allow better penetration. For best performance and appearance on new wood; sand with 60 grit sandpaper before application.

Replace or repair all decayed wood prior to application. Any remaining old finishes should be completely removed.

The use of Bleach is not recommended. Chlorine bleach can significantly reduce service life of the newly applied finish and may cause discoloration of the surface over time.

Application:

Always test in an inconspicuous area. Allow test area to dry completely before evaluation of color and appearance.

Thoroughly mix Deck Defense prior to and during application to keep pigments from settling. Boxing different batch numbers will help to assure consistent color. To help avoid lap marks and inconsistency, take advantage of the natural breaks in the surface when stopping or pausing application.

Deck Defense may be applied with brush or airless sprayer (511 or 513 tip.) Apply in one soaking coat with an average rate of 225 square feet per gallon. Avoid pooling of stain. Back brush to work Deck Defense into surface and to create a consistent finish. A second coat may be applied for a richer and deeper color. Allow four hours before re-coat.

If surface temperature is above 95 degrees; mist surface with water to cool down prior to application. Remove any pooling water before application.

Dry Time:

Deck Defense will dry to the touch in 15 minutes. Tack-free in 4 hours. Allow 24 hours before replacing furniture or allowing heavy traffic.

Note: Drying times will vary depending on temperatures and relative humidity.

Clean Up:


Brushes, sprayers and tools may be cleaned with **Warm Soapy Water**; Landscaping and plants should be "wet down" prior to application, and rinsed to remove excessive overspray. Dried product may require removal with mineral spirits or other typical solvents.

Storage and Disposal: Store containers of Deck Defense out of direct sunlight and protect from freezing. Dispose of containers and unused material in accordance with local, state and federal laws.

WARNING: HARMFUL IF SWALLOWED; POSSIBLE EYE AND SKIN IRRITANT. EXCESSIVE INHALATION OF VAPOR CAN CAUSE HEADACHE, DIZZINESS OR NAUSEA. USE NIOSH APPROVED RESPIRATOR DURING APPLICATION. AVOID BREATHING VAPORS OR MIST AND AVOID CONTACT WITH EYES AND SKIN. KEEP CONTAINER STORED UPRIGHT AND TIGHTLY SEALED. DO NOT REUSE CONTAINER. READ MSDS BEFORE USE. IF SWALLOWED DO NOT INDUCE VOMITING. CONTACT YOUR POISON CONTROL CENTER, HOSPITAL EMERGENCY ROOM OR PERSONAL PHYSICIAN IMMEDIATELY. IN THE EVENT OF EYE CONTACT; IMMEDIATELY FLUSH EYES WITH FRESH WATER. REMOVE CONTACT LENSES, CONTINUE FLUSHING WITH FRESH WATER FOR AT LEAST 15 MINUTES. GET MEDICAL ATTENTION.

Warranty: Perma-Chink Systems, Inc. warrants that Perma-Chink Log Home Products will conform to the descriptions and specifications previously set forth and be free from defects in material and workmanship when shipped to the buyer. EXCEPT WHEN HEREIN EXPRESSLY STATED, THERE ARE NO WARRANTIES, EXPRESSED OR IMPLIED, BY OPERATION OF LAW OR OTHERWISE, APPLICABLE TO THIS PRODUCT. PERMA-CHINK SYSTEMS, INC. EXPRESSLY DISCLAIMS ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

See our technical data sheet for full surface preparation and application guidelines, or visit our website at www.permachink.com. Or call one of our locations for technical assistance @ 1-800-548-3554

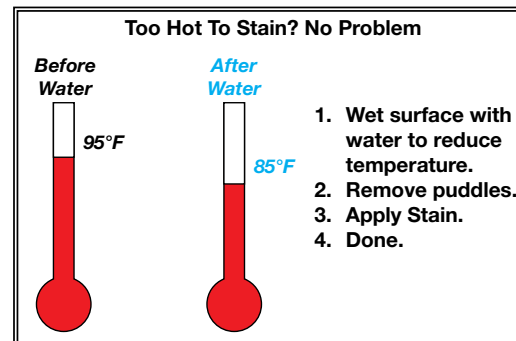

PERMA-CHINK
SYSTEMS, INC.

1-800-548-3554 www.permachink.com